

RAMMER 555E



EXCELLENCE LINE

**FACTORY
INSTALLED
RD3 FOR
MYFLEET**

CBE (CONSTANT
BLOW ENERGY)

MEMBRANE TYPE
ACCUMULATORS

SINGLE BODY DESIGN
WITHOUT TIE RODS


INTEGRATED TOOL BUSHINGS
AND THRUST RING (3 IN 1)

EXCELLENCE LINE HITS SMARTER

The Rammer Excellence Line is a set of state-of-the-art hydraulic hammers for all your rock breaking needs. All Excellence Line hammers now have integrated smart technology for easier fleet management and more efficient processes.

Read more about the product from
www.rammer.com/excellence

**Ram
mer®**

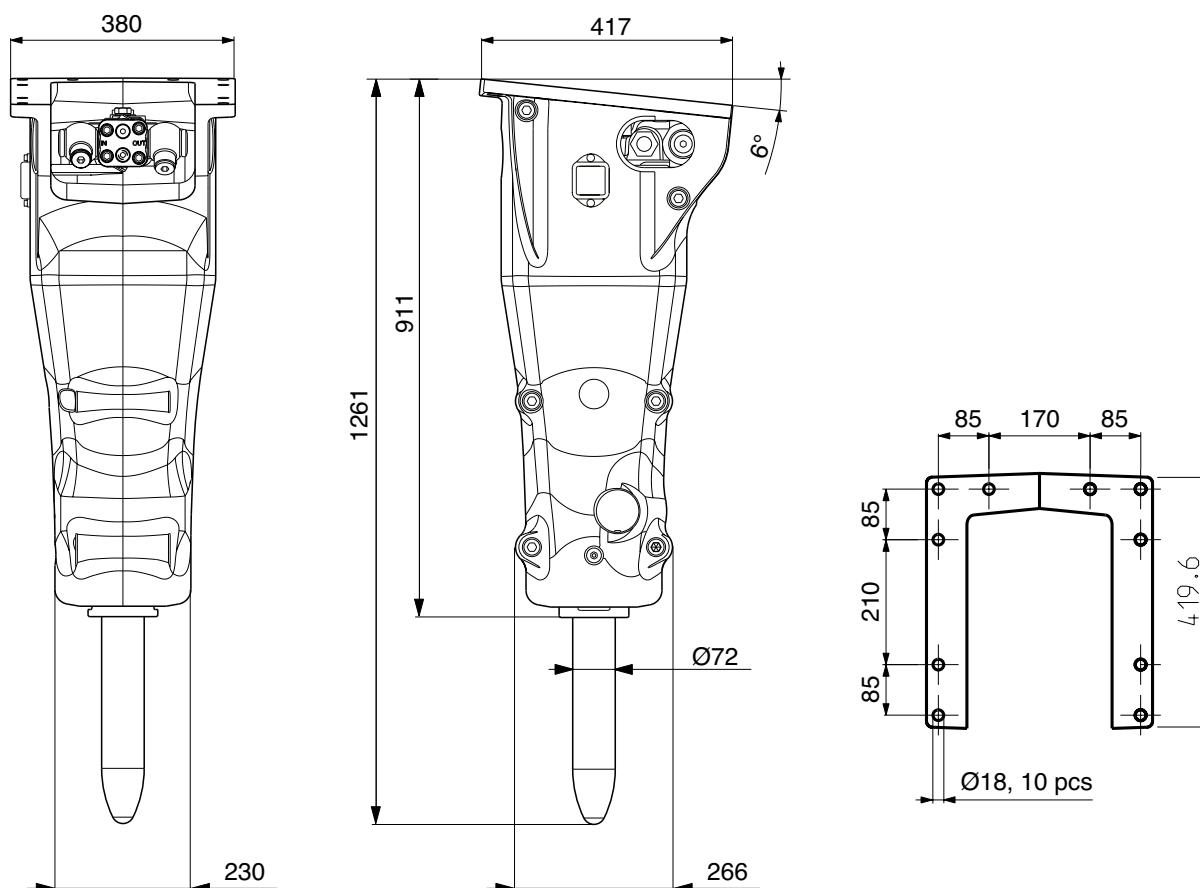

SPECIFICATIONS

Minimum working weight, flange mounted, kg (lb)	275 (610)
Impact rate, bpm	600-1800
Operating pressure, bar (psi)	90-140 (1305-2030)
Pressure relief, max bar (psi)	220 (3190)
Oil flow range, l/min (gal/min)	35-90 (9.2-23.8)
Back pressure, max bar (psi)	20 (290)
Input power, kW (hp)	21 (28)
Tool diameter, mm (in)	72 (2.83)
Miniexcavator weight, allowed range t (lb)	3.2-8.0 (7100-17600)
Skid steer, robot weight, allowed range t (lb)	1.9-5.3 (4200-11700)
Noise level, measured sound power level, LWA dB	118
Noise level, guaranteed sound power level, LWA dB	122

TOOLS

Chisel	Spade
Pyramid	Compacting plate
Moil point	

PARTS

Service kit 1
Special tool grease



VIC/TAS:
03 9315 3788
sales@walkershammers.com.au
SA:
08 8345 0555
ddrew@walkershammers.com.au



walkershammers.com.au